SemiWell **Semiconductor**

BTA06-600B

UL : E228720

Bi-Directional Triode Thyristor

Symbol



TO-220F



Features

- Repetitive Peak Off-State Voltage : 600V
- R.M.S On-State Current ($I_{T(RMS)}$= 6 A)
- High Commutation dv/dt
- Isolation Voltage (V_{ISO} = 1500V AC)

General Description

This device is fully isolated package suitable for AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.
This device is approved to comply with applicable requirements by Underwriters Laboratories Inc.

Absolute Maximum Ratings (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S On-State Current	T_C = 94 °C	6.0	A
I_{TSM}	Surge On-State Current	One Cycle, 50Hz/60Hz, Peak, Non-Repetitive	60/66	A
I^2t	I^2t		18	A^2s
P_{GM}	Peak Gate Power Dissipation		3.0	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.3	W
I_{GM}	Peak Gate Current		2.0	A
V_{GM}	Peak Gate Voltage		10	V
V_{ISO}	Isolation Breakdown Voltage(R.M.S.)	A.C. 1 minute	1500	V
T_J	Operating Junction Temperature		- 40 ~ 125	°C
T_{STG}	Storage Temperature		- 40 ~ 150	°C
	Mass		2.0	g

资料提供：http://www.kkg.com.cn

copyright@SemiWell Semiconductor Co., Ltd., All rights reserved.

Electrical Characteristics

Symbol	Items		Conditions	Ratings			Unit
				Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current		$V_D = V_{DRM}$, Single Phase, Half Wave T_J = 125 °C	—	—	1.0	mA
V_{TM}	Peak On-State Voltage		I_T = 8 A, Inst. Measurement	—	—	1.5	V
I^+_{GT1}	Ⅰ	Gate Trigger Current	V_D = 6 V, R_L=10 Ω	—	—	20	mA
I^-_{GT1}	Ⅱ			—	—	20	
I^-_{GT3}	Ⅲ			—	—	20	
V^+_{GT1}	Ⅰ	Gate Trigger Voltage	V_D = 6 V, R_L=10 Ω	—	—	1.5	V
V^-_{GT1}	Ⅱ			—	—	1.5	
V^-_{GT3}	Ⅲ			—	—	1.5	
V_{GD}	Non-Trigger Gate Voltage		T_J = 125 °C, V_D = 1/2 V_{DRM}	0.2	—	—	V
(dv/dt)c	Critical Rate of Rise Off-State Voltage at Commutation		T_J = 125 °C, [di/dt]c = -3.0 A/ms, V_D=2/3 V_{DRM}	5.0	—	—	V/μs
I_H	Holding Current			—	10	—	mA
$R_{th(j-c)}$	Thermal Impedance		Junction to case	—	—	3.8	°C/W

资料提供：http://www.kkg.com.cn

Fig 1. Gate Characteristics

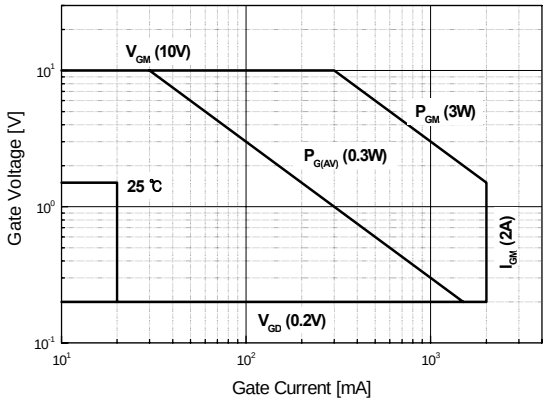

Fig 2. On-State Voltage

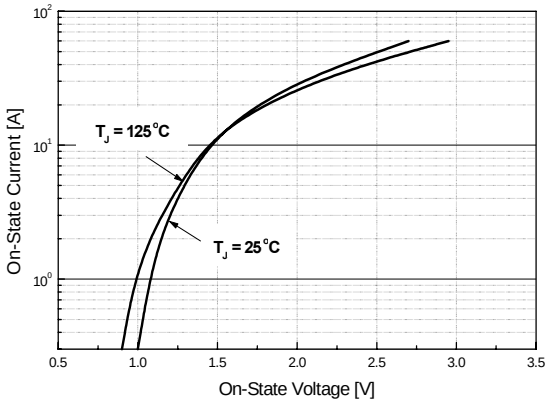

Fig 3. On State Current vs. Maximum Power Dissipation

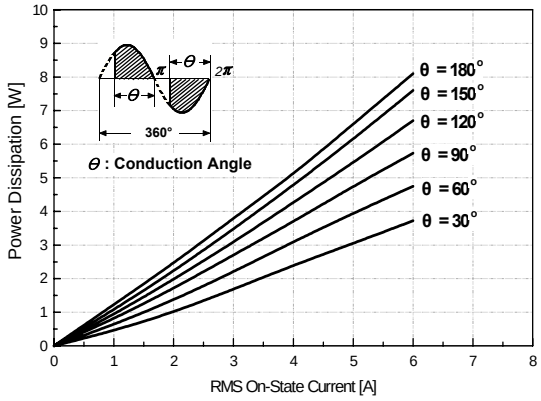

Fig 4. On State Current vs. Allowable Case Temperature

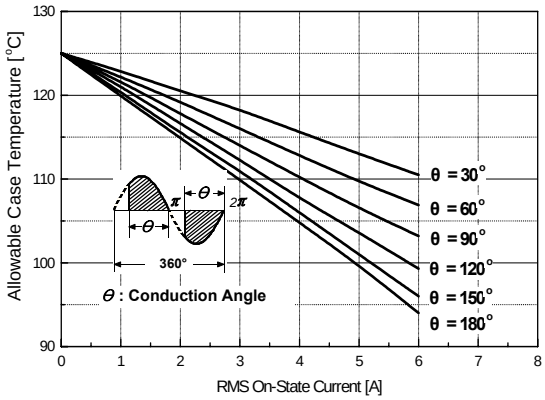

Fig 5. Surge On-State Current Rating (Non-Repetitive)

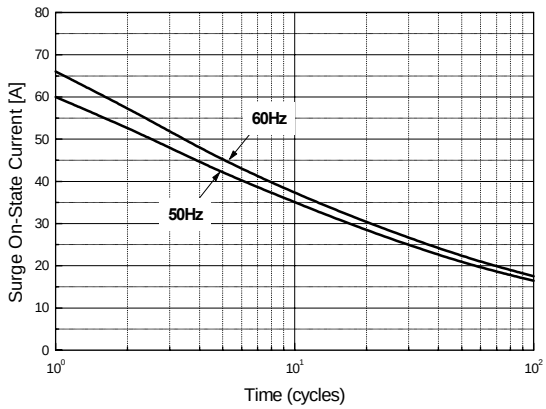

Fig 6. Gate Trigger Voltage vs. Junction Temperature

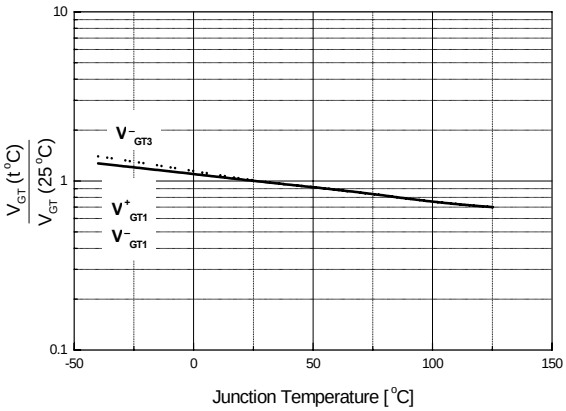

资料提供：http://www.kkg.com.cn

Fig 7. Gate Trigger Current vs. Junction Temperature

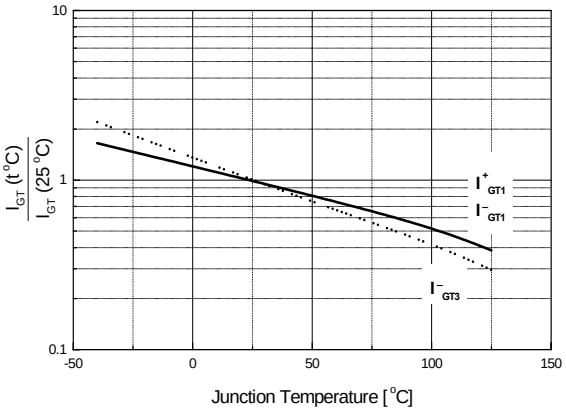

Fig 8. Transient Thermal Impedance

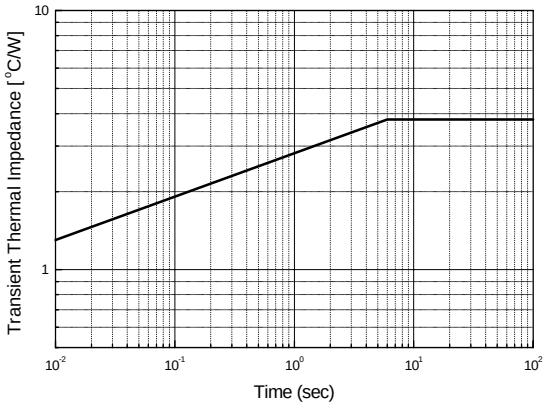

Fig 9. Gate Trigger Characteristics Test Circuit

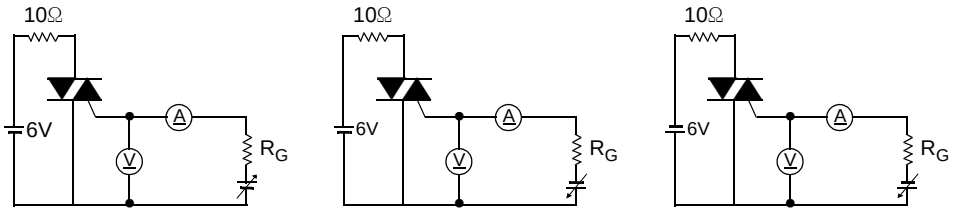

Test Procedure Ⅰ　　Test Procedure Ⅱ　　Test Procedure Ⅲ

资料提供：http://www.kkg.com.cn

TO-220F Package Dimension

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	10.4		10.6	0.409		0.417
B	6.18		6.44	0.243		0.254
C	9.55		9.81	0.376		0.386
D	13.47		13.73	0.530		0.540
E	6.05		6.15	0.238		0.242
F	1.26		1.36	0.050		0.054
G	3.17		3.43	0.125		0.135
H	1.87		2.13	0.074		0.084
I	2.57		2.83	0.101		0.111
J		2.54			0.100	
K		5.08			0.200	
L	2.51		2.62	0.099		0.103
M	1.25		1.55	0.049		0.061
N	0.45		0.63	0.018		0.025
O	0.6		1.0	0.024		0.039
ϕ		3.7			0.146	
ϕ 1		3.2			0.126	
ϕ 2		1.5			0.059	

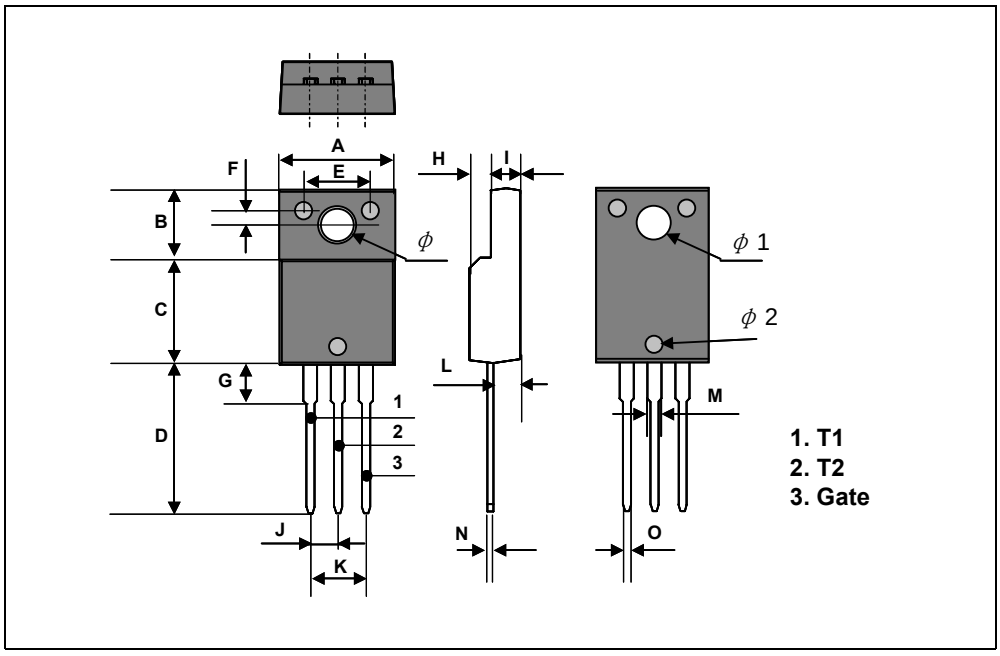

资料提供：http://www.kkg.com.cn

TO-220F Package Dimension, Forming

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	10.4		10.6	0.409		0.417
B	6.18		6.44	0.243		0.254
C	9.55		9.81	0.376		0.386
D	8.4		8.66	0.331		0.341
E	6.05		6.15	0.238		0.242
F	1.26		1.36	0.050		0.054
G	3.17		3.43	0.125		0.135
H	1.87		2.13	0.074		0.084
I	2.57		2.83	0.101		0.111
J		2.54			0.100	
K		5.08			0.200	
L	2.51		2.62	0.099		0.103
M	1.25		1.55	0.049		0.061
N	0.45		0.63	0.018		0.025
O	0.6		1.0	0.024		0.039
P		5.0			0.197	
ϕ		3.7			0.146	
ϕ 1		3.2			0.126	
ϕ 2		1.5			0.059	

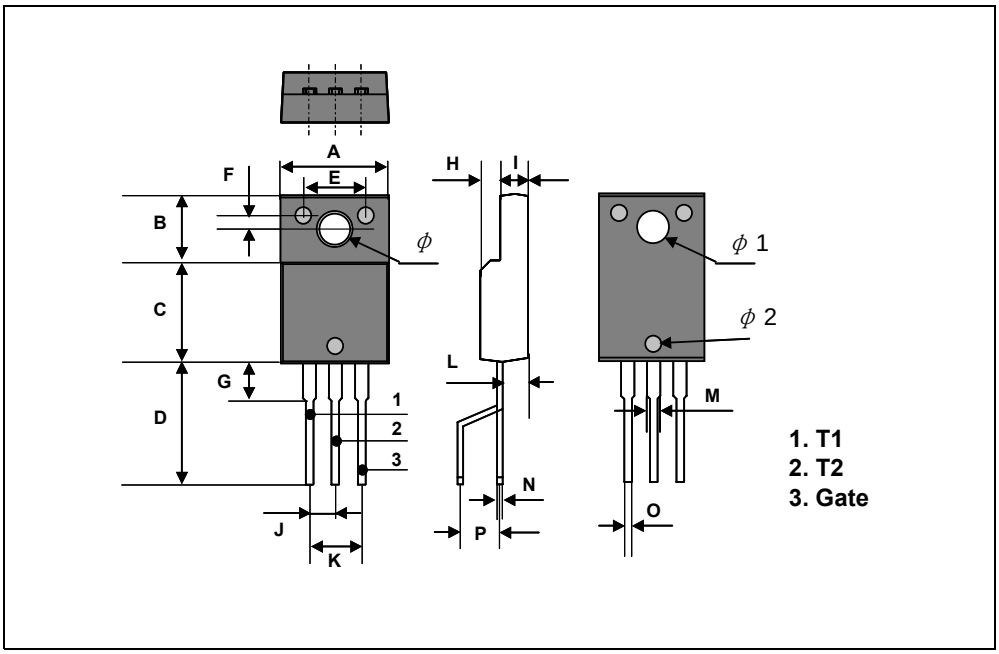

资料提供：http://www.kkg.com.cn